


## » M-III Automatic Film Processor

- Feature:**
- \* Adopt electrical equipment of Germany siemens, Best all-sided and Best reliable.
  - \* With roller of Denmark, no crystallization, no future trouble.
  - \* All of the rollers fieldstrip easily. Cleaning Conveniently.
  - \* Dev. Fix. trough is widening. Film moved fluent naturally no card, no scuffing.
  - \* Dev. Fix. trough heating which all the part are made of PVC, no corrosion .
  - \* The machine can abate pollution, let the waste steam drain away the room.



- Standard Equipments:**
- \* 4 sets of infra-red sensor for scanning replenish system;
  - \* Micro-computer controlled system;
  - \* Energy and water saving system;
  - \* Fixer recovery system;
  - \* Dev. Fix. heating control;
  - \* Dev. Fix. heating control;

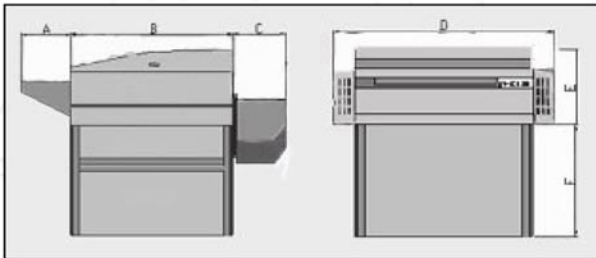

MODEL	III
ITEM	
A	230
B	920
C	300
D	1050
E	315
F	685

### Specifications:

Dispose Of Duration		Kinds Of Machine	
Max Film Width(mm)		Width 635	
Tank Capacity	Dev(L)	16	
	Fix(L)	16	
	Wash(L)	16	
Min Film Width(inch)		50×100mm	
Duration of Processing		Developer	310mm
		Fixer	310mm
		Wash	310mm
		Dry	500mm
Chomical Temp Control Range		20.0°C - 45.0°C set up space 0.1°C	
Dryer Temp Control Range		20.0°C - 70.0°C set up space 0.1°C	
Replenishment		regular oxidation prevention replenishment and area automatic replenishment	
Power		220V 50/60Hz 1phase 20A	